

Battery Charger Series

**PowerBase**

www.powerbasehk.com

PowerBase Industrial (HK) Ltd.



ROOM 503, TOWER A, NEW MANDARIN PLAZA,  
14 SCIENCE MUSEUM ROAD, TST EAST,  
KOWLOON, HONG KONG

Tel : (852) 2773 9909, 2773 9939  
Fax : (852) 2773 9992  
E-mail : info@powerbasehk.com

**Designation : Switching Quick Charger**

**Model No. : C-513**

<b>Input Voltage (Universal Switches)</b>	AC 100~240V, 50~60Hz Cable plug-in (UL, VDE, BS, SAA)
<b>Charge Capability</b>	Two or Four 'AA' NiMH Batteries Two or Four 'AAA' NiMH Batteries
<b>Charge Current</b>	'AA' (2 or 4 piece) : 500mA 'AAA' (2 or 4 piece) : 500mA
<b>Car Adaptor</b>	12V / DC, 2A fuse, ( Optional Accessory)
<b>Termination Method</b>	Minus Delta V (-ΔV)
<b>Trickle Charge</b>	Continuous, 10mA ~ 20mA
<b>Features</b>	Auto Voltage switching 100~240V LED indicator shows charging status. Short circuit protection. Limit timer protection. Multiple mode of charging.

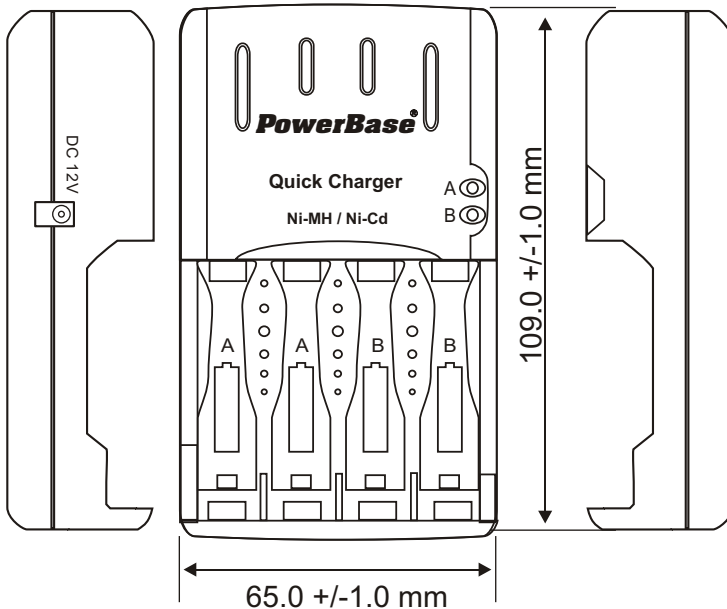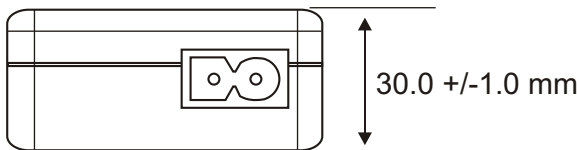

**Cord Cable**  
UL, VDE, SAA, CH, BS



**Cigarette Lighter Adaptor**  
12V / DC

<b>Dimension (Approximate)</b>	109mm(L) x 65mm(W) x 30mm(H)
<b>Weight (Approximate)</b>	Charger : 140 g (without battery)
<b>Housing</b>	PC, White colour

**Individual Data sheet**

This specifications is only for generally reference, about the Charger and Batteries performance, warranty, modification/designs. Please contact PowerBase for the latest information.

C-512-DS001

**PowerBase**