

Battery Charger Series



www.powerbasehk.com

PowerBase Industrial (HK) Ltd.


ROOM 503, TOWER A, NEW MANDARIN PLAZA,
14 SCIENCE MUSEUM ROAD, TST EAST,
KOWLOON, HONG KONG

Tel : (852) 2773 9909, 2773 9939
Fax : (852) 2773 9992
E-mail : info@powerbasehk.com

Designation : Switching Quick Charger

Model No. : **C-521**

Input Voltage (International)	AC 100~240V, 50~60Hz Cable plug-in (UL, VDE, BS, SAA)
Charge Capability	Four or Eight 'AA' NiMH Batteries
	Four or Eight 'AAA' NiMH Batteries
Charge Current	'AA' (4 or 8 piece) : 400mA
	'AAA' (4 or 8 piece) : 250mA
Car Adaptor	12V / DC, 2A fuse, (Optional Accessory)
Termination Method	Timer control cut-off : 5 hrs limited
Features	- Auto Voltage switching 100~240V - LED indicator shows charging status. - Multiple mode of charging (indoor AC outlet or outdoor 12V DC car adaptor).

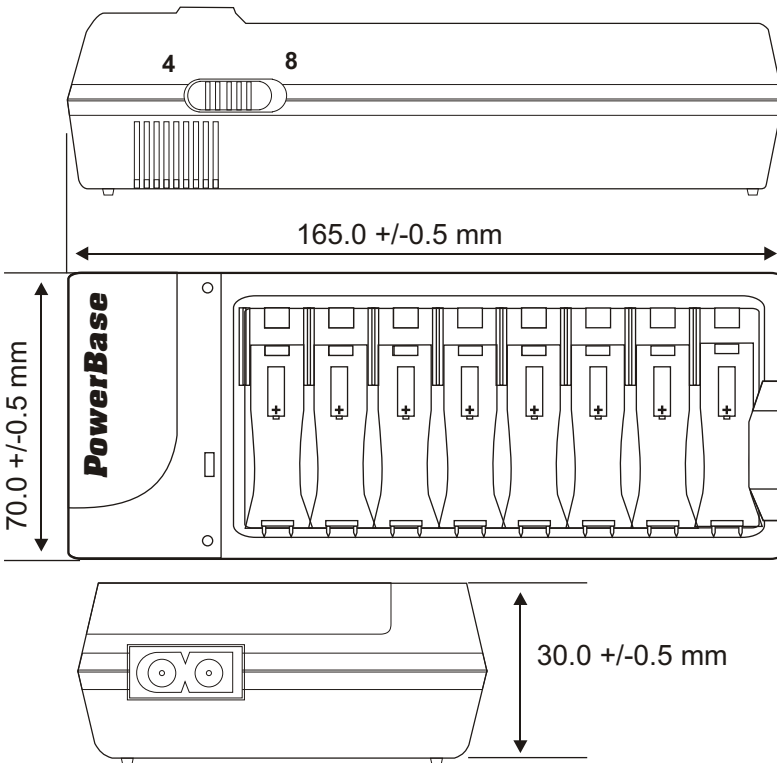

Cord Cable
UL, VDE, SAA, CH, BS



Cigarette Lighter Adaptor
12V / DC

Dimension (Approximate)	165mm(L) x 70mm(W) x 30mm(H)
Weight (Approximate)	Charger : 145 g (without battery)
Housing	ABS, Black colour

Individual Data sheet

This specifications is only for generally reference, about the Charger and Batteries performance, warranty, modification/designs. Please contact PowerBase for the latest information.

C-521-DS001

