

Battery Charger Series

PowerBase

www.powerbasehk.com

PowerBase Industrial (HK) Ltd.

ROOM 1107, TOWER 1, ENTERPRISE SQUARE PHASE 1,
9 SHEUNG YUET ROAD, KOWLOON BAY, HONG KONG

Tel : (852) 2773 9909, 2773 9939

Fax : (852) 2773 9992



E-mail : info@powerbasehk.com

Specification

Model No.: **C-733**

Universal Li-ion Battery Charger

Input Voltage	Switching Power Adaptor AC 100~240V, 50~60Hz (UL, VDE, BS, SAA plugs)
Charge Capability	Li-ion Rechargeable Battery 3.6V - 3.7V , 7.2V - 7.4V
Car Adaptor	12V / DC, 2A fuse, (Optional Accessory)
Charge Current	4.2V : 700mA 8.4V : 700mA
Termination Method	Auto Voltage Monitor
Timer control	8 hours
Features	<ul style="list-style-type: none"> - International Voltage 100~240V. - Car Adaptor power input - LED indicator shows charging and fully charged stage. - Automatic IC cut-off - Short circuit protection. - Timer protection.

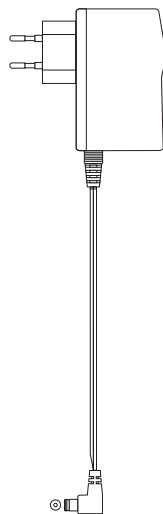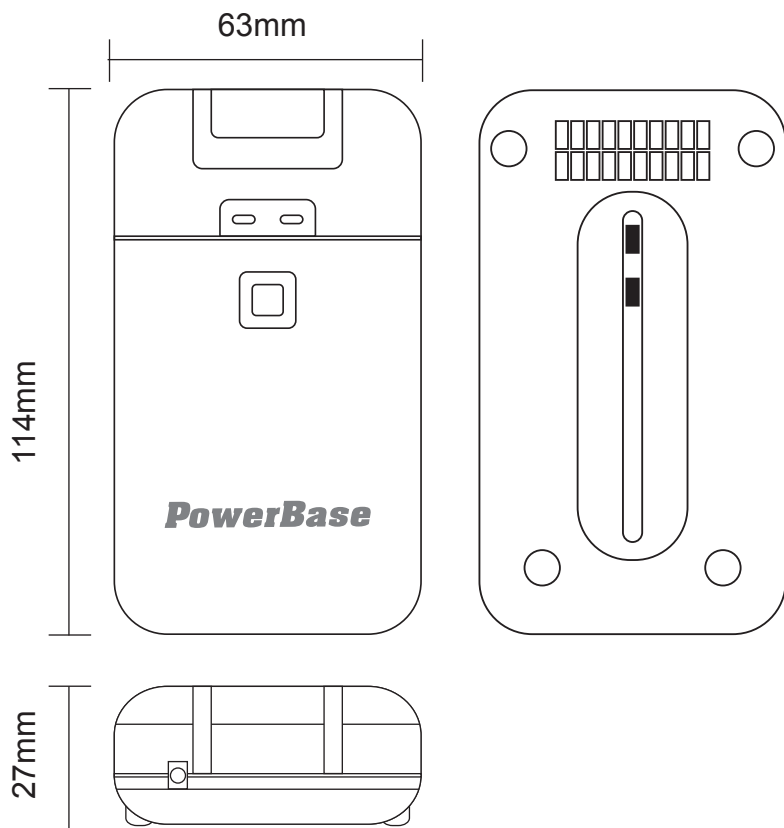

Switching Power Adaptor

UL, VDE, SAA, BS plugs
AC 100-240V



Car Adaptor

12V / DC

Dimension (Approximate)	114mm(L) x 63mm(W) x 27mm(H)
Weight (Approximate)	Charger : 62g (without battery)
Housing	PC : Black Colour

Individual Data sheet

This specifications is only for generally reference, about the Charger and Batteries performance, warranty, modification/designs.
Please contact PowerBase for the latest information.

PowerBase