

Battery Charger Series

**PowerBase**

www.powerbasehk.com

PowerBase Industrial (HK) Ltd.

ROOM 1107, TOWER 1, ENTERPRISE SQUARE PHASE 1,  
9 SHEUNG YUET ROAD, KOWLOON BAY, HONG KONG

Tel : (852) 2773 9909, 2773 9939

Fax : (852) 2773 9992



E-mail : info@powerbasehk.com

## Specification

**Model No.: C-734U**

USB Universal Li-ion & NiMH Battery Charger

<b>Input Voltage</b>	Switching Power Adaptor AC 100~240V, 50~60Hz (UL, VDE, BS, SAA plugs)
<b>Charge Capability</b>	Li-ion Rechargeable Battery 3.6V - 3.7V (DC 4.2V : 700mA) 7.2V - 7.4V (DC 8.4V : 700mA) USB output : DC 5V, 1000mA
<b>Car Adaptor</b>	12V / DC, 2A fuse, (Optional Accessory)
<b>Charge Current</b>	4.2V : 700mA 8.4V : 700mA
<b>Termination Method</b>	Auto Voltage Monitor
<b>Timer control</b>	8 hours
<b>Features</b>	<ul style="list-style-type: none"> <li>- International Voltage 100~240V.</li> <li>- Car Adaptor power input</li> <li>- LED indicator shows charging and fully charged stage.</li> <li>- Automatic IC cut-off</li> <li>- Short circuit protection.</li> <li>- Timer protection.</li> </ul>

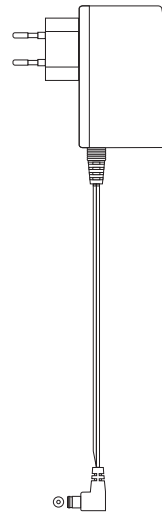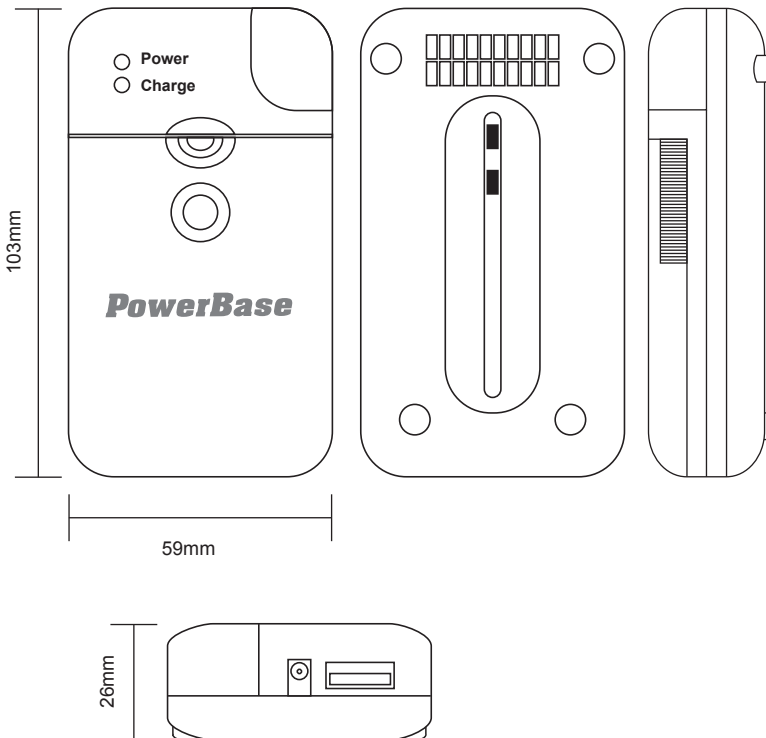

### Switching Power Adaptor

UL, VDE, SAA, BS plugs  
AC 100-240V



### Car Adaptor

12V / DC

<b>Dimension (Approximate)</b>	103mm(L) x 59mm(W) x 26mm(H)
<b>Weight (Approximate)</b>	Charger : 81g (without battery)
<b>Housing</b>	PC : Black Colour

## Individual Data sheet

This specifications is only for generally reference, about the Charger and Batteries performance, warranty, modification/designs.  
Please contact PowerBase for the latest information.

**PowerBase**