

Battery Charger Series

PowerBase

www.powerbasehk.com

PowerBase Industrial (HK) Ltd.



ROOM 503, TOWER A, NEW MANDARIN PLAZA,
14 SCIENCE MUSEUM ROAD, TST EAST,
KOWLOON, HONG KONG

Tel : (852) 2773 9909, 2773 9939
Fax : (852) 2773 9992
E-mail : info@powerbasehk.com

Designation : 1 hour Switching Rapid Charger

Model No. : C-401

Charge Capability	Two or Four 'AA' NiMH Batteries
	Two or Four 'AAA' NiMH Batteries
Charge Current	AA / 2 ~ 2.5A
	AAA / 1 ~ 1.3A
Charge Time	60 min. NiMH AA 2300mAh
	30 min. NiMH AAA 800mAh
Trickle Charge	Continuous, 10mA ~ 20mA
Switching AC/DC Adaptor	AC 100-240V ~ 50-60Hz DC 12V 1.5A (SAA, VDE, UL, BS, CH)
Car Adaptor	12V / DC, 2A fuse, (Optional Accessory)
Features	LED indicates charging status. Auto IC control fully charge and short circuit protection. 1.5 hours timer protection. Battery voltage detection.

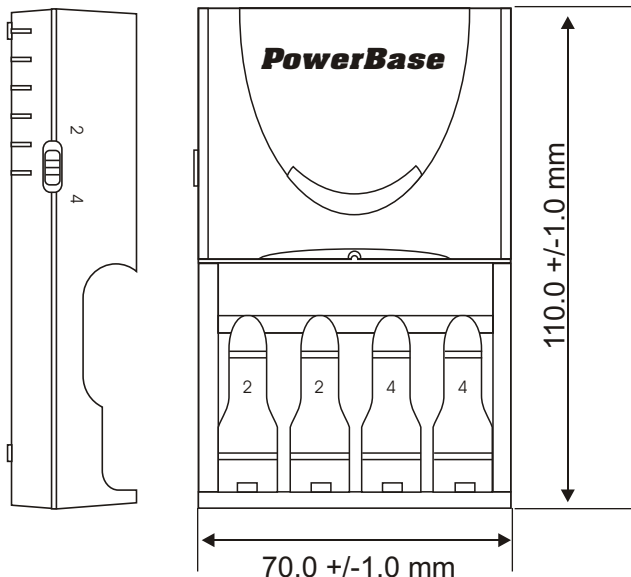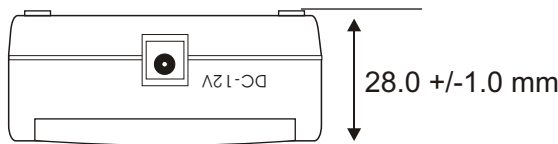

Switching power supply
SAA, UL, VDE, CH, BS



Car Adaptor
12V / DC

Dimension (Approximate)	110mm(L) x 70mm(W) x 28mm(H)
Weight (Approximate)	Charger : 262 g (without battery),
Housing	PC : Pearl Gray or Pearl White, Colours

Individual Data sheet

This specifications is only for generally reference, about the Charger and Batteries performance, warranty, modification/designs. Please contact PowerBase for the latest information.

PowerBase