

Battery Charger Series

PowerBase

www.powerbasehk.com

PowerBase Industrial (HK) Ltd.


ROOM 503, TOWER A, NEW MANDARIN PLAZA,
14 SCIENCE MUSEUM ROAD, TST EAST,
KOWLOON, HONG KONG

Tel : (852) 2773 9909, 2773 9939
Fax : (852) 2773 9992
E-mail : info@powerbasehk.com

Designation : 1 hour Switching Rapid Charger

Model No. : **C-412**

Charge Channel	Four Individual Channel
Charge Capability	One to Four AA /AAA NiMH Batteries
Charge Current	1700 mA / AA 900 mA / AAA
Charge Time	Approx. 60 min. NiMH AA 2000mA Approx. 60 min. NiMH AAA 1000mA
Termination Method	Minus Delta V (- Δ V)
Trickle Charge	Continuous, 20mA ~ 30mA
Switching AC/DC Adaptor	AC 100-240V ~ 50-60Hz DC 12V 1.5A (SAA, VDE, UL, BS, CH)
Car Adaptor	12V / DC, 2A fuse, (Optional Accessory)
Features	1, 2, 3, or 4 individual channel. Blue & Red LED indicates charging and standby status. Auto IC control fully charge and short circuit protection. 120 minutes timer protection. Battery voltage detection.

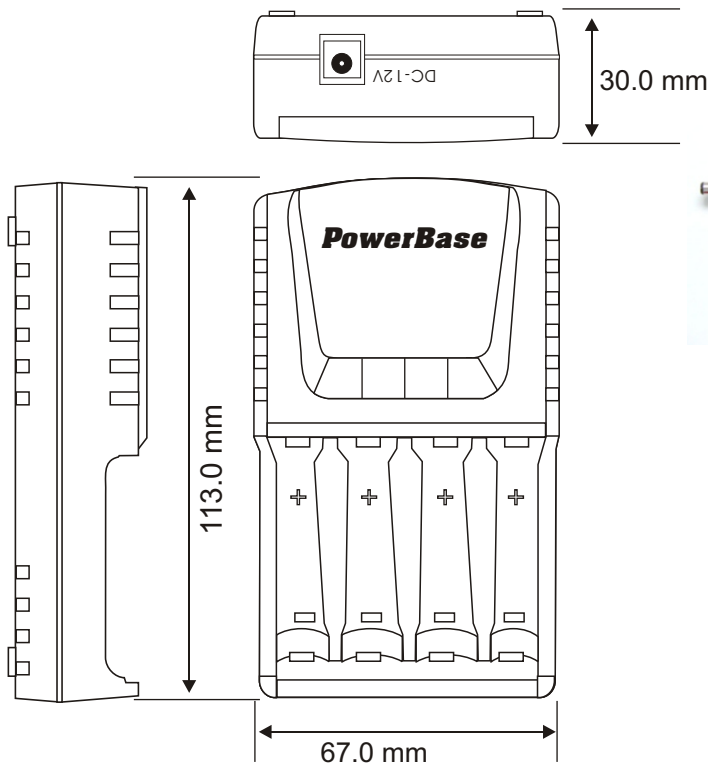

Switching power supply

SAA, UL, VDE, CH, BS

Car Adaptor

12V / DC

Dimension (Approximate)	113mm(L) x 67mm(W) x 30mm(H)
Weight (Approximate)	Charger : 262 g (without battery),
Housing	PC : Pearl Gray or Pearl White, Colours

Individual Data sheet

This specifications is only for generally reference, about the Charger and Batteries performance, warranty, modification/designs.
Please contact PowerBase for the latest information.

PowerBase