

Battery Charger Series

PowerBase

www.powerbasehk.com

PowerBase Industrial (HK) Ltd.


ROOM 503, TOWER A, NEW MANDARIN PLAZA,
14 SCIENCE MUSEUM ROAD, TST EAST,
KOWLOON, HONG KONG

Tel : (852) 2773 9909, 2773 9939
Fax : (852) 2773 9992
E-mail : info@powerbasehk.com

Designation : 1 hour Switching Rapid Charger

Model No. : **C-422**

Charge Capability	One to Four AA / AAA NiMH Batteries
Input Voltage (Universal Switches)	AC 100~240V, 50~60Hz Cable plug-in (UL, VDE, BS, SAA)
Charge Current	1 x AA / 1800 mA, 4x AA / 1200mA 1 x AAA / 1200 mA, 4x AAA / 800mA
Car Adaptor	12V / DC, 2A fuse, (Optional Accessory)
Termination Method	Minus Delta V (-ΔV)
Trickle Charge	Continuous, 20mA ~ 30mA
Features	1, 2, 3, or 4 individual channel. LED each channel indicates charging and standby status. Auto IC control for fully charge. Short circuit protection. Timer protection.

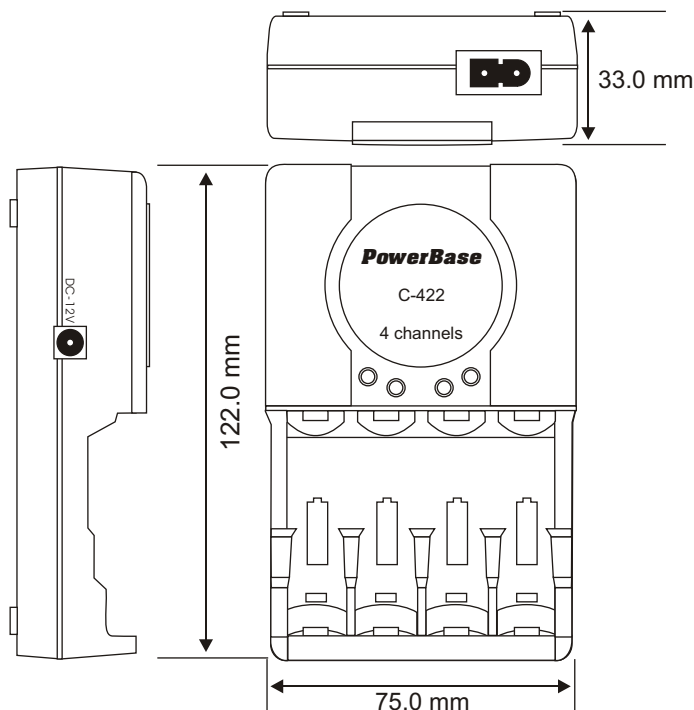

Cord Cable

UL, VDE, SAA, CH, BS



Cigarette Lighter Adaptor

12V / DC

Dimension (Approximate)	122mm(L) x 75mm(W) x 33mm(H)
Weight (Approximate)	Charger : 130 g (without battery)
Housing	PC, ABS Pearl Gray or Silver colour

Individual Data sheet

This specifications is only for generally reference, about the Charger and Batteries performance, warranty, modification/designs. Please contact PowerBase for the latest information.

PowerBase