

Battery Charger Series



www.powerbasehk.com

PowerBase Industrial (HK) Ltd.




ROOM 503, TOWER A, NEW MANDARIN PLAZA,
14 SCIENCE MUSEUM ROAD, TST EAST,
KOWLOON, HONG KONG

Tel : (852) 2773 9909, 2773 9939
Fax : (852) 2773 9992
E-mail : info@powerbasehk.com

Designation : Switching Quick Charger

Model No. : C-421

Charge Channel	Two Individual Channels
Charge Capability	1 or 2 AA / AAA NiMH/NiCd Batteries
Charge Current	600 mA / AA
	600 mA / AAA
Charge Time	Approx. 4 hrs. NiMH AA 2000mA
	Approx. 2 hrs. NiMH AAA 1000mA
Termination Method	Minus Delta V (-ΔV)
Trickle Charge	Continuous, 20mA ~ 30mA
International Voltage	Switching : 100~240V 50~60Hz (UL, VDE, SAA, BS, JIS)
Features	<ul style="list-style-type: none"> - 1 or 2 AA / AAA size Ni-MH/Ni-Cd batteries can be charged. - Red LED indicates the charging is processing. - Auto IC cut-off control in fully charge and short circuit protection. - Pulse charge current.

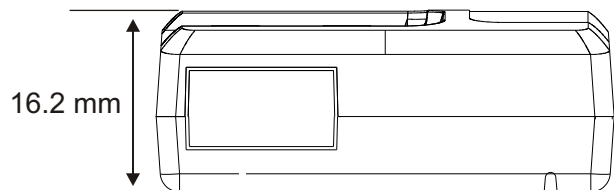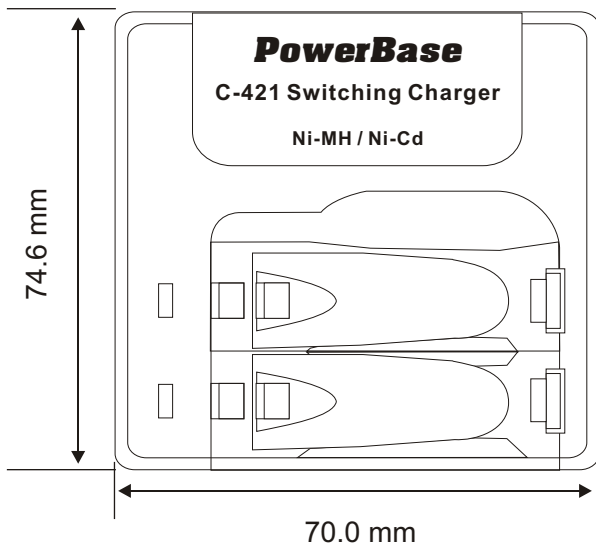

Cord Cable

UL, VDE, SAA, CH, BS

Dimension (Approximate)	74.6mm(L) x 70mm(W) x 16.2mm(H)
Weight (Approximate)	Charger : 130 g (without battery),
Housing	PC / ABS : Pearl Gray or Pearl White, or Custom Colours

Individual Data sheet

This specifications is only for generally reference, about the Charger and Batteries performance, warranty, modification/designs. Please contact PowerBase for the latest information.

