

Battery Charger Series

**PowerBase**

www.powerbasehk.com

PowerBase Industrial (HK) Ltd.

ROOM 503, TOWER A, NEW MANDARIN PLAZA,  
14 SCIENCE MUSEUM ROAD, TST EAST,  
KOWLOON, HONG KONG

Tel : (852) 2773 9909, 2773 9939



Fax : (852) 2773 9992

E-mail : info@powerbasehk.com

## Specification

<b>Input Voltage</b>	USB, DC 5V, 500 mAh
	USB Power Adaptor AC 100~240V (UL, VDE, BS, SAA plugs)
	USB Car Adaptor DC, 12V
<b>Charge Capability</b>	2 or 4 x AA NiMH Batteries
	2 or 4 x AAA NiMH Batteries
<b>Charge Current</b>	2 x AA 2.8V : 500mA
	4 x AA 5.6V : 250mA
	2 x AAA 2.8V : 500mA
	4 x AAA 5.6V : 250mA
<b>Termination Method</b>	Minus Delta V (- $\Delta$ V)
<b>Timer protection</b>	5.5 hours
<b>Trickle Charge</b>	Continuous 10mA ~ 20mA
<b>Features</b>	<ul style="list-style-type: none"> <li>- USB power input</li> <li>- International Voltage 100~240V</li> <li>- USB car adaptor power input</li> <li>- LCD display show charging and fully charged stage</li> <li>- Automatic IC cut-off</li> <li>- Short circuit protection</li> <li>- Timer protection</li> </ul>

**Model No.: C-432**  
**LCD USB Charger**

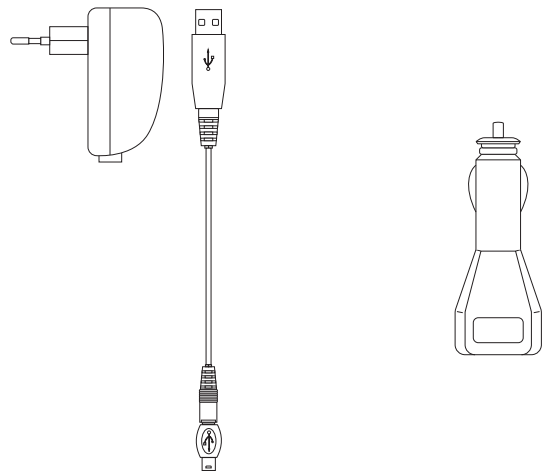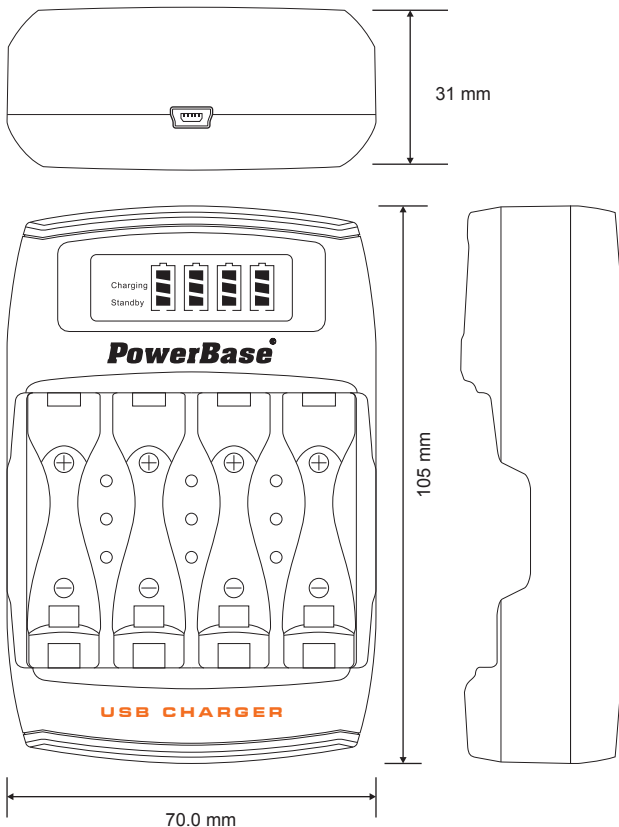

### USB Power Adaptor

UL, VDE, SAA, BS plugs  
USB 5V Output

### USB Car Adaptor

12V / DC  
USB 5V Output

<b>Dimension (Approximate)</b>	105mm(L) x 70mm(W) x 30mm(H)
<b>Weight (Approximate)</b>	Charger : 61g (without battery),
<b>Housing</b>	PC : Pearl Gray or Pearl White, Colours

## Individual Data sheet

This specifications is only for generally reference, about the Charger and Batteries performance, warranty, modification/designs. Please contact PowerBase for the latest information.

**PowerBase**